PREDICTED ENERGY ASSESSMENT



Plot 152, 2 Bed,

Dwelling type:

House, Semi-Detached

K, WC, B

Date of assessment:

Produced by:


Total floor area:

19/02/2024 Henry Knight 85.34 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

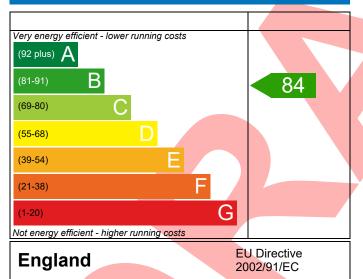

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

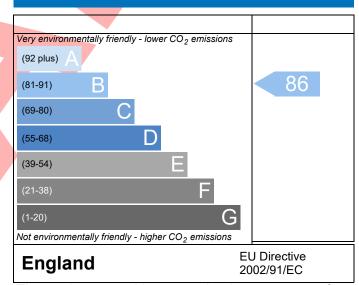

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-U528-444	4-152			Issued on Date	19/02/2024
Assessment 153		Pr	op Type Ref	3B HT B Semi (As)	
Reference					
Property Plot 152, 2 Bed	, K, WC, B				
SAP Rating	84 B	DER	17.80	TER	18.62
Environmental	86 B	% DER <ter< td=""><td></td><td>4.41</td><td></td></ter<>		4.41	
CO₂ Emissions (t/year)	1.26	DFEE	47.71	TFEE	53.66
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>11.09</td><td></td></tfee<>		11.09	
	Henry Knight, Tel: 011	73183565,		Assessor ID	U528-0001
Henry.knight@aess	sc.co.uk				
Client					
SUMARY FOR INPUT DATA FOR New Bu	ild (As Designed)				
Criterion 1 – Achieving the TER and TFE	E rate				
1a TER and DER					
Fuel for main heating	Mains	gas			
Fuel factor	1.00 (mains gas)			
Target Carbon Dioxide Emission Rate	(TER) 18.62	18.62 kgCO ₂ /m ²			
Dwelling Carbon Dioxide Emission Ra	te (DER) 17.80	17.80 kgCO ₂ /m ²			
	-0.82	(-4.4%)		kgCO₂/m²	
1b TFEE and DFEE	F2.66			134/1 / 2/	
Target Fabric Energy Efficiency (TFEE		53.66 kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DF		11.2%)		kWh/m²/yr kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibility	-0.0 (-	11.2/0		KVVII/III / yI	Pass
Limiting Fabric Standards					
2 Fabric U-values Element	Average		liah ost		
External wall	Average 0.25 (max. 0.30)		l ighest .25 (max. 0.70	2)	Pass
Party wall	0.25 (max. 0.30)		.25 (IIIdx. 0.70))	Pass
Floor	0.18 (max. 0.25)		.18 (max. 0.70	1)	Pass
Roof	0.11 (max. 0.20)				Pass
Openings	1.38 (max. 2.00)				
2a Thermal bridging			,		Pass
Thermal bridging calculated from	linear thermal transn	nittances for each iu	nction		
3 Air permeability					
Air permeability at 50 pascals	5.01 (5.01 (design value) m³/(h.m²) @ 50 Pa			1
Maximum	10.0	0,		m³/(h.m²) @ 50 Pa	
Limiting System Efficiencies					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass		
	Data from database Worcester Greenstar 32CDi Compact ErP			
	Combi boiler			
	Efficiency: 89.8% SEDBUK2009			
	Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Time and temperature zone control			
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in sur	mmer			
9 Summertime temperature				
Overheating risk (South West England)	Not significant	Pass		
Based on:				
Overshading	Average			
Windows facing North	1.20 m², No overhang			
Windows facing East	6.55 m ² , No overhang			
Windows facing West	4.04 m², No overhang			
Air change rate	3.00 ach			
Blinds/curtains	None			
Criterion 4 – Building performance consistent with	DER and DFEE rate			
Party Walls				
Туре	U-value			
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass		
Air permeability and pressure testing				
3 Air permeability				
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0 $m^3/(h.m^2)$ @ 50 Pa	Pass		
10 Key features				
Party wall U-value	0.00 W/m ² K			
Roof U-value	0.11 W/m ² K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£61	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£607	A 95	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£668	A 95	A 97	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

